




TYPHOON MULTI-FUNCTION 5.25" FRONT PANEL 6-in-1 CARD READER

PRODUCT SPECIFICATION

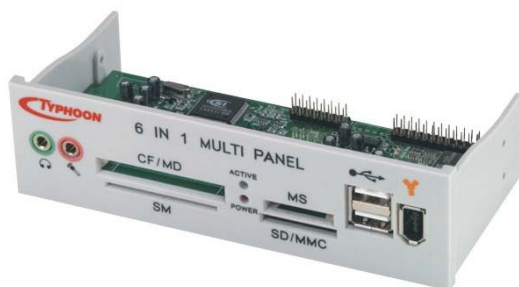

Introduction

Increase your productivity with a single upgrade which comes with 6-in-1 Card Reader, USB ports, Firewire (IEEE 1394) port, Mic IN and Headset Out connections. All in a single 5.25" front panel for immediate and easy access in front of the computer. No need to access the connections from the back of the computer anymore. Use the Typhoon Multi Panel and operate your tasks directly. 6-in-1 card reader for your Digital memory cards data transfer. Direct USB port for your gaming devices and the Firewire port for your Digital Video device connections.

FEATURES

#83056

- Four sockets support Secure Digital Card, Multi Media Card, Memory Stick, Smart Media Card, compact Flash Card, and IBM Micro drive.
- 3 connectors, for 1394a x 1 port & USB x 2 port
- 2 phone jacks, for Mic & Headphone (stereo speakers output) function.
- Allows data exchange in different sockets.
- Internal design fit into 5.25" drive bay to save the desktop space
- Full-speed USB Rev. 1.1 interface access to storage card reaches 12Mbit/sec.
- Active LED indicators of power and busy (read/write) equipped.
- OS supports Windows 98 / 98SE / 2000 / ME / XP
- Supports Mass Storage Class Drive; no additional device driver needed under Windows ME/XP.
- USB powered; no external power required.

Specifications

Function

- Supports 8-256MB Secure Digital Card
- Supports 8-128MB MMC Card
- Supports 4-128MB MS Card
- Supports 4-256MB Smart Media Card
- Supports 4-512MB Compact Flash Card
- Supports 340MB / 512MB / 1.2GB IBM Micro drive
- Supports Mass Storage Class Drive
- Supports Hot-Swapping

Socket & Connector

- CF/MD socket x 1
- SD/MMC socket x 1
- MS socket x 1
- SM socket x 1

- USB connector x 2
- 1394 connector x 1
- Phone Jack x 2 (EAR-PHONE & MIC-PHONE)

Interface

- Internal USB Rev. 1.1 device with Hub

Power

- DC +5.0V from USB cable directly

Environment

- Operating temperature: 0°C~70°C
- Storage temperature: -40°C~70°C
- Relative Humidity: Operating RH: 50% Storage RH: 95%(Max without condensing)

Packing

- Cable x 1
- Screw x 4
- Driver CD
- User Manual x 1
- Panel sticker x 2
- Front panel x 1
- Metal bracket x 1

System Requirements

- Intel® Pentium® II or above
- 1 free 5.25" front slot for the 6in1 Multi Panel
- 1 available PCI slot for the interface metal bracket
- 1 available USB port
- 1 available Firewire port
- 1 free internal power cable
- Sound Card
- CD ROM drive for driver installation
- Windows® 98 SE / ME / 2000 / XP